


Datasheet

E-2000® (LSH) – DIAMOND

Version: 23.04.2019

Manufacturer	DIAMOND GmbH	
Compliance	IEC 61754-15, TIA 604-16	
Fixing	2-hole flange mounting Quick fixing clip	
Temperature range	Operating temperature	-40 °C to +85 °C
	Storage temperature	-40 °C to +90 °C
Versions	Simplex, duplex / multimode	
	Simplex, duplex / singlemode	
	Simplex, duplex / singlemode APC	

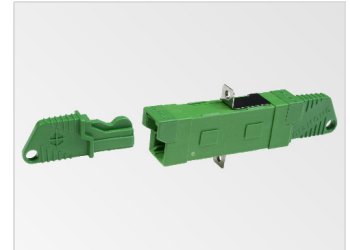

E-2000® (LSH) simplex singlemode APC adapter

Multimode

Sleeve material	Zirconia, slitted
Housing material	Plastic / Beige
Mating cycles	1,000
Typical loss	≤ 0.15 dB

Singlemode

Sleeve material	Zirconia, slitted
Housing material	Plastic / Blue
Mating cycles	1,000
Typical loss	≤ 0.15 dB

Singlemode APC

Sleeve material	Zirkonia, slitted
Housing material	Plastic / Green
Mating cycles	1,000
Typical loss	≤ 0.15 dB

